


【GSRHT4D28-SERIES】

DIMENSIONS & RECOMMENDED PATTERN

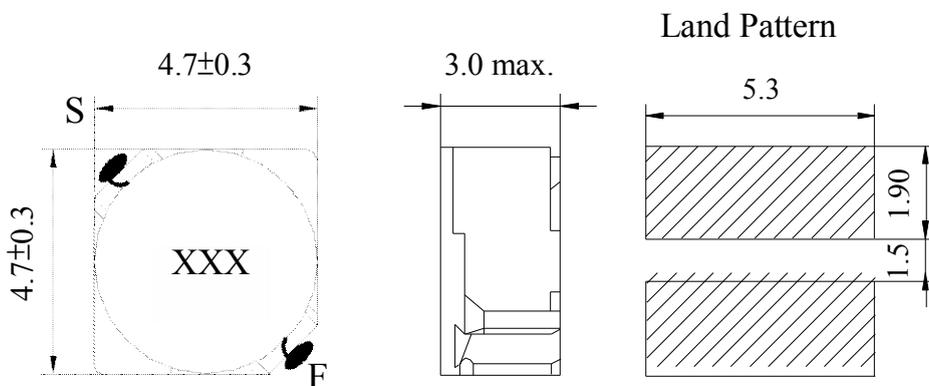

Unit: mm

※ FEATURES

- Applications : DC to DC converter of portable equipment, camcorder, LCD television set, digital camera, P.D.A., notebook

SELECTION GUIDE FOR STANDARD COILS

| GENERIC Part Number | Inductance | Tolerance | DC Resistance | Inductance Decrease Current |
|---------------------|------------|------------|------------------|-----------------------------|
| | (μ H) | (%) | (Ω) Max | (A) Max |
| GSRHT4D28 - 1R2N | 1.2 | $\pm 30\%$ | 0.0236 | 2.56 |
| GSRHT4D28 - 1R8N | 1.8 | $\pm 30\%$ | 0.0275 | 2.20 |
| GSRHT4D28 - 2R2N | 2.2 | $\pm 30\%$ | 0.0313 | 2.04 |
| GSRHT4D28 - 2R7N | 2.7 | $\pm 30\%$ | 0.0433 | 1.60 |
| GSRHT4D28 - 3R3N | 3.3 | $\pm 30\%$ | 0.0492 | 1.57 |
| GSRHT4D28 - 3R9N | 3.9 | $\pm 30\%$ | 0.0648 | 1.44 |
| GSRHT4D28 - 4R7N | 4.7 | $\pm 30\%$ | 0.0720 | 1.32 |
| GSRHT4D28 - 5R6N | 5.6 | $\pm 30\%$ | 0.1009 | 1.17 |
| GSRHT4D28 - 6R8N | 6.8 | $\pm 30\%$ | 0.1089 | 1.12 |
| GSRHT4D28 - 8R2N | 8.2 | $\pm 30\%$ | 0.1175 | 1.04 |
| GSRHT4D28 - 100M | 10.0 | $\pm 20\%$ | 0.1283 | 1.00 |
| GSRHT4D28 - 120M | 12.0 | $\pm 20\%$ | 0.1316 | 0.84 |
| GSRHT4D28 - 150M | 15.0 | $\pm 20\%$ | 0.1490 | 0.76 |
| GSRHT4D28 - 180M | 18.0 | $\pm 20\%$ | 0.1660 | 0.72 |
| GSRHT4D28 - 220M | 22.0 | $\pm 20\%$ | 0.2350 | 0.70 |
| GSRHT4D28 - 270M | 27.0 | $\pm 20\%$ | 0.2610 | 0.58 |
| GSRHT4D28 - 330M | 33.0 | $\pm 20\%$ | 0.3780 | 0.56 |
| GSRHT4D28 - 390M | 39.0 | $\pm 20\%$ | 0.3837 | 0.50 |
| GSRHT4D28 - 470M | 47.0 | $\pm 20\%$ | 0.5870 | 0.48 |

【GSRHT4D28-SERIES】

SELECTION GUIDE FOR STANDARD COILS

| GENERIC Part Number | Inductance | Tolerance | DC Resistance | Inductance Decrease Current |
|---------------------|------------|------------|------------------|-----------------------------|
| | (μ H) | (%) | (Ω) Max | (A) Max |
| GSRHT4D28 - 560M | 56.0 | $\pm 20\%$ | 0.6245 | 0.41 |
| GSRHT4D28 - 680M | 68.0 | $\pm 20\%$ | 0.6990 | 0.35 |
| GSRHT4D28 - 820M | 82.0 | $\pm 20\%$ | 0.9148 | 0.32 |
| GSRHT4D28 - 101M | 100.0 | $\pm 20\%$ | 1.0200 | 0.29 |
| GSRHT4D28 - 121M | 120.0 | $\pm 20\%$ | 1.2700 | 0.27 |
| GSRHT4D28 - 151M | 150.0 | $\pm 20\%$ | 1.3500 | 0.24 |
| GSRHT4D28 - 181M | 180.0 | $\pm 20\%$ | 1.5400 | 0.22 |
| GSRHT4D28 - 221M | 220.0 | $\pm 20\%$ | 1.7200 | 0.20 |
| GSRHT4D28 - 271M | 270.0 | $\pm 20\%$ | 1.9500 | 0.16 |
| GSRHT4D28 - 331M | 330.0 | $\pm 20\%$ | 2.6600 | 0.14 |
| GSRHT4D28 - 391M | 390.0 | $\pm 20\%$ | 2.8300 | 0.13 |

- ※ GENERAL SPECIFICATION:
- a. Inductance drop =35% typ. at IDC.
 - b. $\Delta T=40^{\circ}\text{C}$ rise at IDC.
 - c. Operating Temperature : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - d. Test Freq. : 100KHz / 0.1V.